

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

THIS PAGE BLANK (USPTO)



The
Patent
Office

09/889207




09/889207

GB 00
00059

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

E U

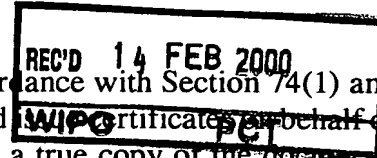


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and certify on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

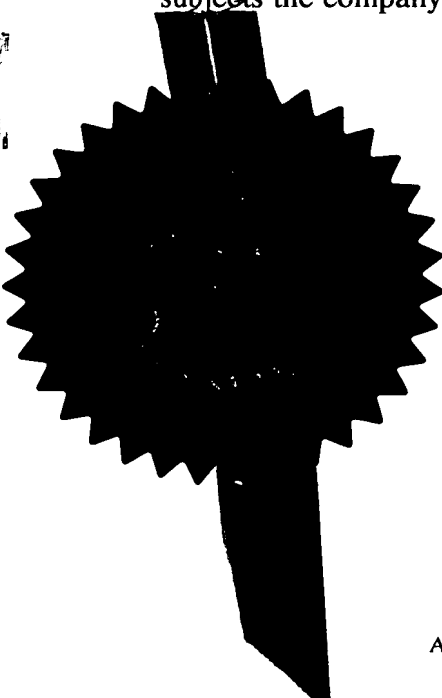

Signed *Andrew Gersey*
Dated 28 January 2000

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

THIS PAGE BLANK (USPTO)

1 JAN 1999


14 JAN 99 E417698-1 D01860
P01/7700 0.00 - 9900701.5

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



1. Your reference

P/23232.GB/CJW

2. Patent application number

(The Patent Office will fill in this part)

9900701.5

3. Full name, address and postcode of the or of each applicant (underline all surnames)

SEA CONTAINERS SERVICES LTD
SEA CONTAINERS HOUSE
20 UPPER GROUND
LONDON SE1 9PF

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

2065020001

4. Title of the invention

INSULATED FREIGHT CONTAINER AND A TOP RAIL THEREFOR

5. Name of your agent (if you have one)

LANGNER PARRY

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

52-54 High Holborn
London
WC1V 6RR

Patents ADP number (if you know it)

1032001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description ⁹

Claim(s) To follow

Abstract To follow

Drawing(s) 4

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) 1

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Langner Parry
LANGNER PARRY

Date 13.1.99

12. Name and daytime telephone number of person to contact in the United Kingdom

CLIFFORD J WANT 0171 242 5566

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

INSULATED FREIGHT CONTAINER AND A TOP RAIL THEREFOR

This invention relates to an insulated freight container and to a top rail therefor.

5

An insulated freight container has an inner and outer skin with an interstitial space between the skins filled with an insulating solidified foam. The outer skin is typically of aluminium and the inner skin of stainless steel. The outer roof skin and outer side skin are connected together by an extruded top rail. As shown in figure 1, the top rail 100 has a transverse cross-sectional shape similar to a query mark. A vertical portion 102 of the rail 100 is riveted to an outer side skin 110 before the container is fully assembled and before the interstitial spaces 111 are completely filled with foam 115. As is evident from figure 1, the upper portion 104 of the rail 100 is oriented outwards of the container in order that both sides of this portion 104 are accessible for riveting the outer roof panel 118 to the rail 100 after the rail is riveted to the outer side skin 110.

10
15

However, the above container has a number of disadvantages. The fixing of rivets 120 is labour intensive and time consuming and the apertures necessary for the rivets 120 tend to weaken the top panel 118. As a result, the top panel 118 may tear or buckle allowing the ingress of water into the interstitial space 111 and thereby destroy the insulating property of the foam 115. Moreover, the rivet holes tend to elongate as the container flexes, again allowing the ingress of water. In addition,

20

the protruding upper portion 104 of the rail 100 is liable to damage in collision with other containers during the stacking of containers. Despite these difficulties, there is a strong prejudice in the art towards the riveting of panels to rails, in particular, in the case of aluminum rails and panels.

5

It is an object of this invention to provide an improved top rail for an insulated freight container and an improved method of manufacturing such a freight container.

10

According to one aspect of this invention there is provided a top rail for an insulated double-skinned freight container, the rail in use forming a junction between an outer skin of a side wall and an outer skin of a roof panel of the container, said top rail comprising a first portion for attachment to the side wall, an angled second portion at a first obtuse angle to the first portion and adapted to be angled inwardly of the container in use, and a third portion for attachment to the roof panel angled at a second obtuse angle to the angled portion so that the third portion is substantially perpendicular to the first portion, the rail being adapted to be welded to at least one of the outer skin of the side panel and the outer skin of the roof panel.

15

20

Advantageously, the rail and/or panel are made of aluminium.

Conveniently, the top rail has a return section substantially perpendicular to the third portion at an edge of the third portion remote from the angled portion, the

return section being adapted to be disposed inwardly of the container in use.

Advantageously, the first obtuse angle is between 140 degrees and 160 degrees.

5 Advantageously, the top rail has a web perpendicular to the first portion and attached to the first portion, the web being adapted to be disposed inwardly of the container in use.

Conveniently, an outer surface of the third portion is provided with a longitudinal bead against which the outer skin of the roof panel abuts to provide a
10 welding edge.

According to a second aspect of this invention, there is provided an insulated freight container having a top rail, the top rail forming a junction between an outer skin of a side wall and an outer skin of a roof panel of the container, wherein the
15 rail comprises a first portion for attachment to the side wall, an angled second portion which is angled at a first obtuse angle to the first portion and angled inward of the container, and a third portion attached to the roof and angled at a second obtuse angle to the angled portion so that the third portion is substantially perpendicular to the first portion and the rail is welded to at least one of the outer
20 skin of the side panel and the outer skin of the roof panel.

Conveniently, the rail and/or the side panel and/or the roof panel are of aluminium.

Advantageously, the top rail has a return section substantially perpendicular to the third portion located at an edge of the third portion remote from the angled portion and disposed inwardly of the container.

5

Advantageously, the top rail has a web perpendicular to the first portion and attached to the first portion, the web being adapted to be disposed inwardly of the container in use.

10 Conveniently, the first obtuse angle is between 140 degrees and 160 degrees.

According to a third aspect of the present invention there is provided a method of manufacturing an insulated double-skinned freight container comprising the steps of:

- 15 a) providing an outer and inner skin of a floor panel,
- b) locating the inner skin of a floor panel parallel to and spaced from the outer skin by foam spacing stanchions,
- c) injecting foam between the inner and outer skins,
- d) providing outer and inner skins of side panels, locating the inner skins
- 20 parallel to the respective outer skin and spaced from them by foam spacing stanchions, inserting foam between the inner and outer skins,
- e) fixing an edge of the side panels to the floor panel by a known method and filling with foam in the vicinity of the joints,

- f) providing a top rail having a first portion for attachment to the side wall,
an angled second portion at a first obtuse angle to the first portion and
adapted to be angled inwardly of the container in use and a third portion
for attachment to the roof panel angled at a second obtuse angle to the
5 angled portion and substantially perpendicular to the first portion,
- g) riveting said top rail to the outer skin of the side walls, and fixing with a
known method the inner skin of the roof panel to the inner skin of the side
walls,
- h) welding the outer skin of the roof panel to the third portion of the top rail
10 and filling the space between the inner and outer skins of the top panel
with foam.

The rail of the present invention has the advantage of providing added
strength and providing greater protection to the top rail from impact damage than
15 rails of the prior art since the rail has no protruding portion. The top rail of the
invention also has a smaller total cross section area than the rails of the prior art, but
with the material concentrated where the greatest strength is required, i.e. on the
angled section. The use of a welded joint also avoids weakening the outer skin by
riveting, and reduces the likelihood of the ingress of water into the insulation foam.

20

The invention will now be described by way of example with reference to
the accompanying drawing in which ;

Figure 1 shows a prior art transverse cross-section of a top rail installed in a

container,

Figure 2 shows a transverse cross-section of a top rail according to the invention, installed in a container,

Figure 3 shows a perspective view of the top rail of Figure 2 installed in a
5 container,

Figure 4 shows a transverse cross-section of an alternative embodiment of the top rail according to the invention installed in a container,

Figure 5 shows an enlarged view of a transverse cross-section of the top rail of Figures 2 & 3, and

10 Figure 6 shows an enlarged view of a transverse cross-section of the top rail of Figure 4.

In the figures like reference numerals denote like parts.

The top rail 1 shown in transverse cross-section in Figure 2 has a first
15 vertical portion 2, a second angled portion 3 angled inwards of the container in use at an angle α of 150 degrees to the first portion and third horizontal portion 4 connected at an angle β of 120 degrees of the angled portion 3 and oriented at right angles to the vertical portion 2. The first, second and third portions 2, 3, 4 of the rail 1 thereby form a chamfered right angle. The third portion 4 is provided with a
20 return portion 5 located by an edge of the return portion 5 to an edge of the third portion 4 remote from the second angled portion 3, the return portion 5 being at right angles to the third portion 4 and inward of the container in use.

The vertical portion 2 is provided with a web 6 perpendicular to the vertical

portion 2 and located on the vertical portion 2 proximate a junction between the vertical portion 2 and the angled portion 3 and inward of the container in use.

As can be seen in the enlarged drawings of figures 5 or 6, the vertical
5 portion 2 is further provided with lower, median and upper horizontal ribs 7, 8, 9,
at upper and lower edges of the portion 2 and substantially along a median line of
the portion 2 on an outer surface of the rail 1. The inner surface of the vertical
section 2 is provided with a cut-away portion 10 extending substantially from a
position opposite the lower rib 7 to a position opposite the median rib 8, for
10 receiving an outer skin 11 of a side panel 12.

The third portion 4 may also be provided with a longitudinal bead 13, raised
above an outer surface of the portion 4 at a junction between the portion 4 and the
angled portion 3.

15

In the manufacture of a freight container using the top rail 1 of the invention,
the floor and side panels are constructed from inner and outer skins 16, 11 with
foam 15 in the interstitial space between the skins in a manner known per se, the
inner and outer skins being placed parallel with each other, separated by foam
20 stanchions and the interstitial space being injected with foam 15 so that the inner and
outer skins 16, 11 are held together by the foam 15 when the foam sets. The top
rail 1 is riveted to the outer skin 11 of the side panel 12, the outer skin 11 of the side
panel 12 being accommodated in the cut-away 10 in the inner surface of the vertical

section 2. The inner skin 17 of the top panel 14 is attached to the inner skin 16 of the side panels in a known manner and the outer skin 18 is welded to the top rail 1 with an edge of the outer skin 18 abutting the longitudinal bead 13 where present, secured by a weld bead 19 with the outer skin 18 partially overlapping the horizontal
5 section 4. The interstitial space between the outer and inner skins 18, 17 of the top panel 14 is injected with foam 15 so that the return portion 5 of the top rail 1 and the web 6 are embedded in the set foam 15.

Although it is normally more efficient to weld the top panel 14 to the rail 1,
10 it will be understood that the outer skin of the top panel 14 could be riveted to the rail 1 and the outer skin 11 of the side panel 12 welded to the rail 1, or both panels 12 and 14 could be welded to the rail 1. Instead of welding, a suitable adhesive may be used.

15 The return section 5 and the web 6 impart strength to the rail 1 in axial twisting so that the rail 1 according to the invention is stronger than the rails of the prior art in relation to flexing in a vertical direction and equally strong in respect of axial twisting. The web 6 also forms a convenient boundary for an initial insertion of foam within the side wall before the top panel is assembled to the rail, and a final
20 foaming of the corner between the side wall and the top panel. In addition, the web 6 facilitates molding in the manufacture of the rail 1.

A second embodiment of the invention is shown in the transverse cross-section in Figure 4; in this embodiment the portion 4 is not provided with a bead and the weld bead 20 overlaps the edge of the outer skin of the top panel, the top panel partially overlapping the portion 4 of the rail 1.

5

The strengthening ribs 7,8,9 of the vertical portion 2 provide strength against side impacts and the angled portion 3 of the rail assists in glancing off impacting containers in collisions during stacking.



10

The total cross-sectional area of the rail of the invention is less than the total cross-section area of rails of the prior art and therefore less material is used in the construction of the rail and yet the strength is concentrated in the angled section where damage is mostly likely to occur. Additional strength is provided by the strengthening ribs 7,8,9 on the vertical section 2 and by the web 6 and the return



15

portion 5.


THIS PAGE BLANK (USPTO)

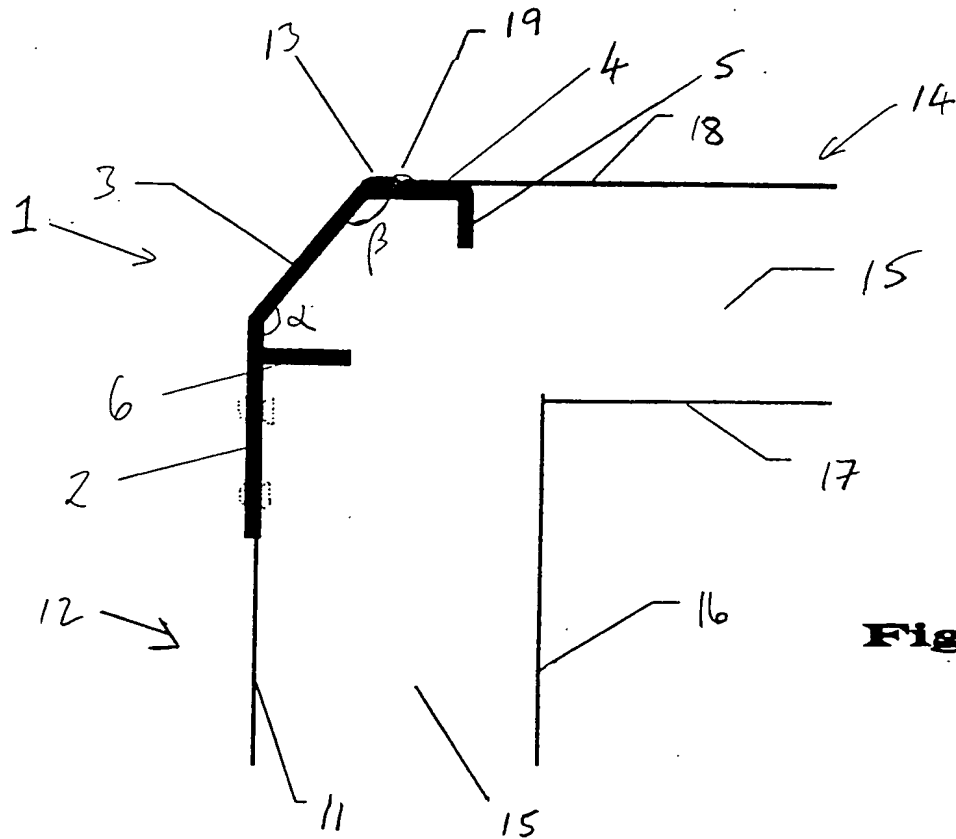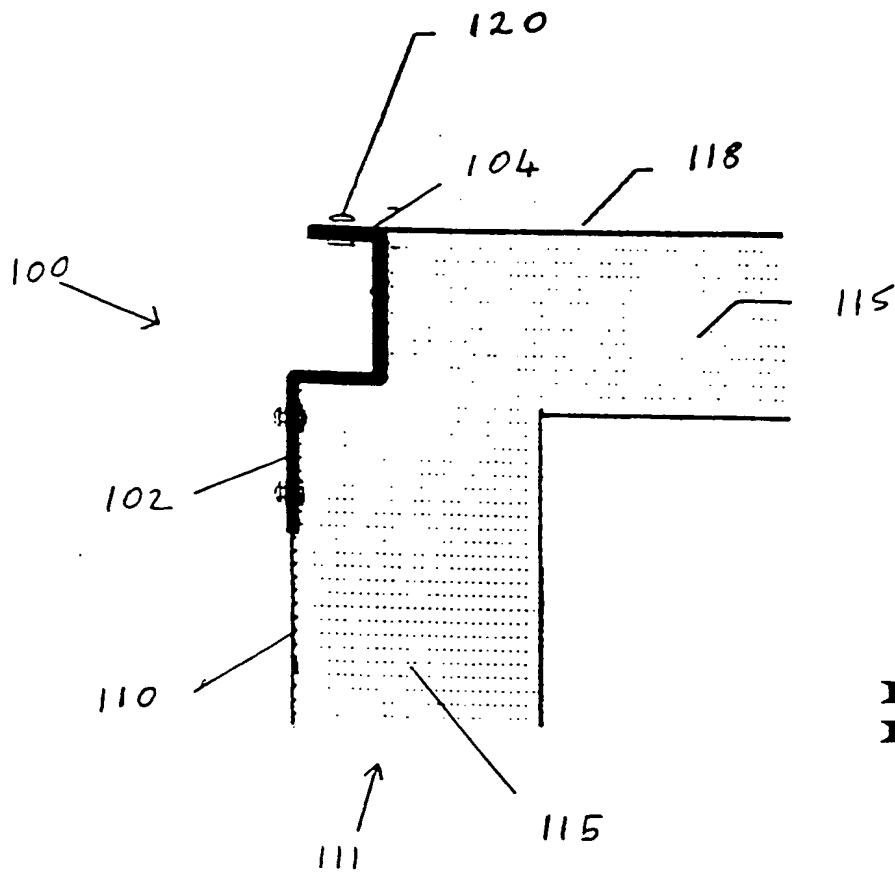


THIS PAGE BLANK (USPTO)

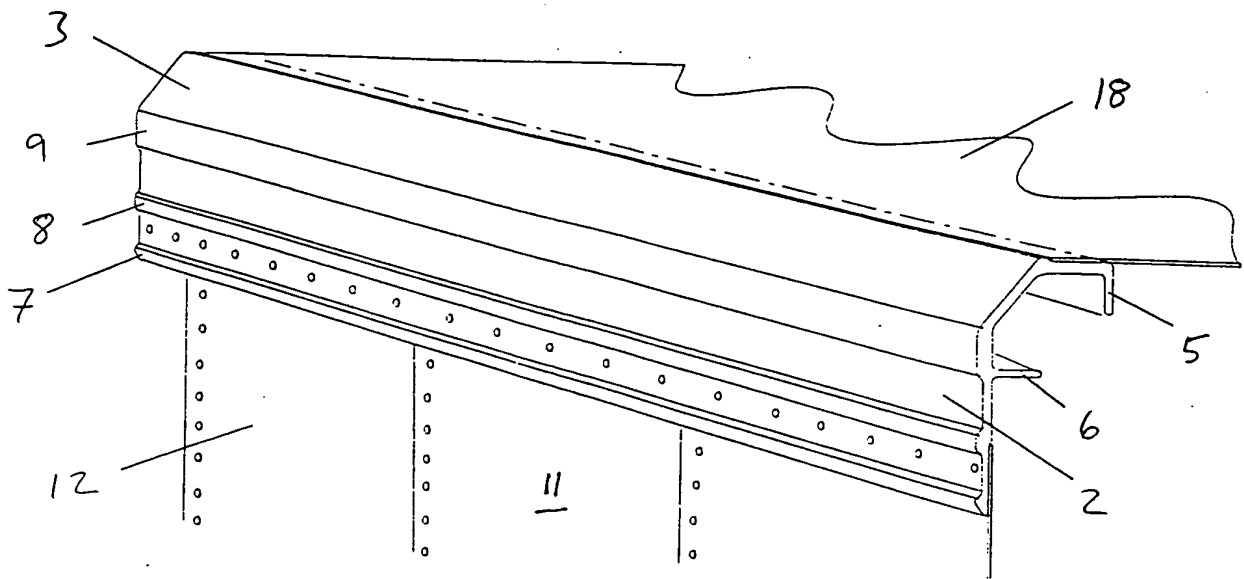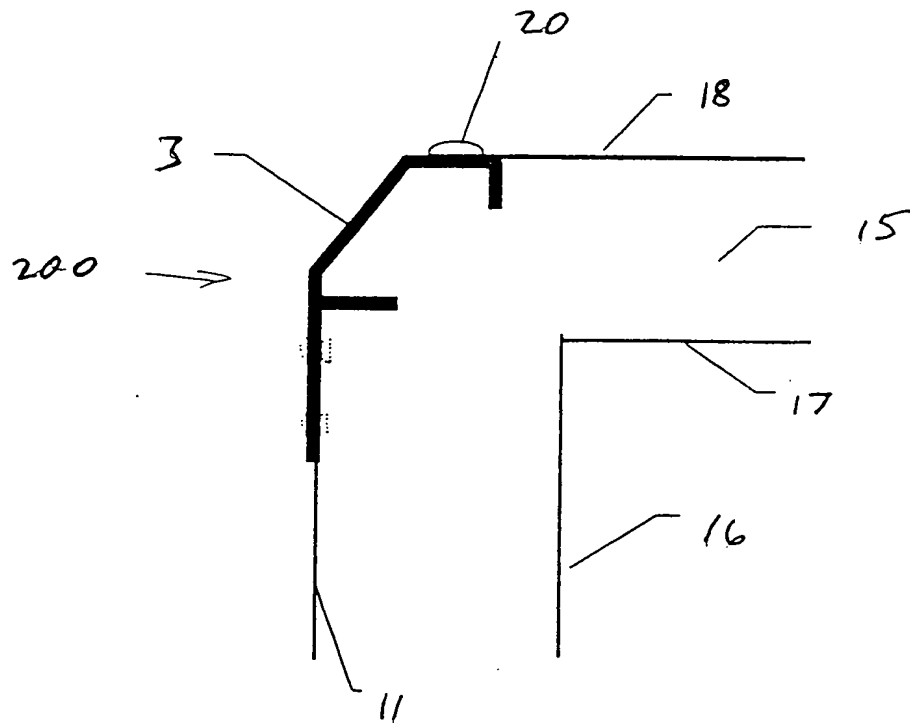**Fig. 3****Fig. 4**

THIS PAGE BLANK (USPTO)

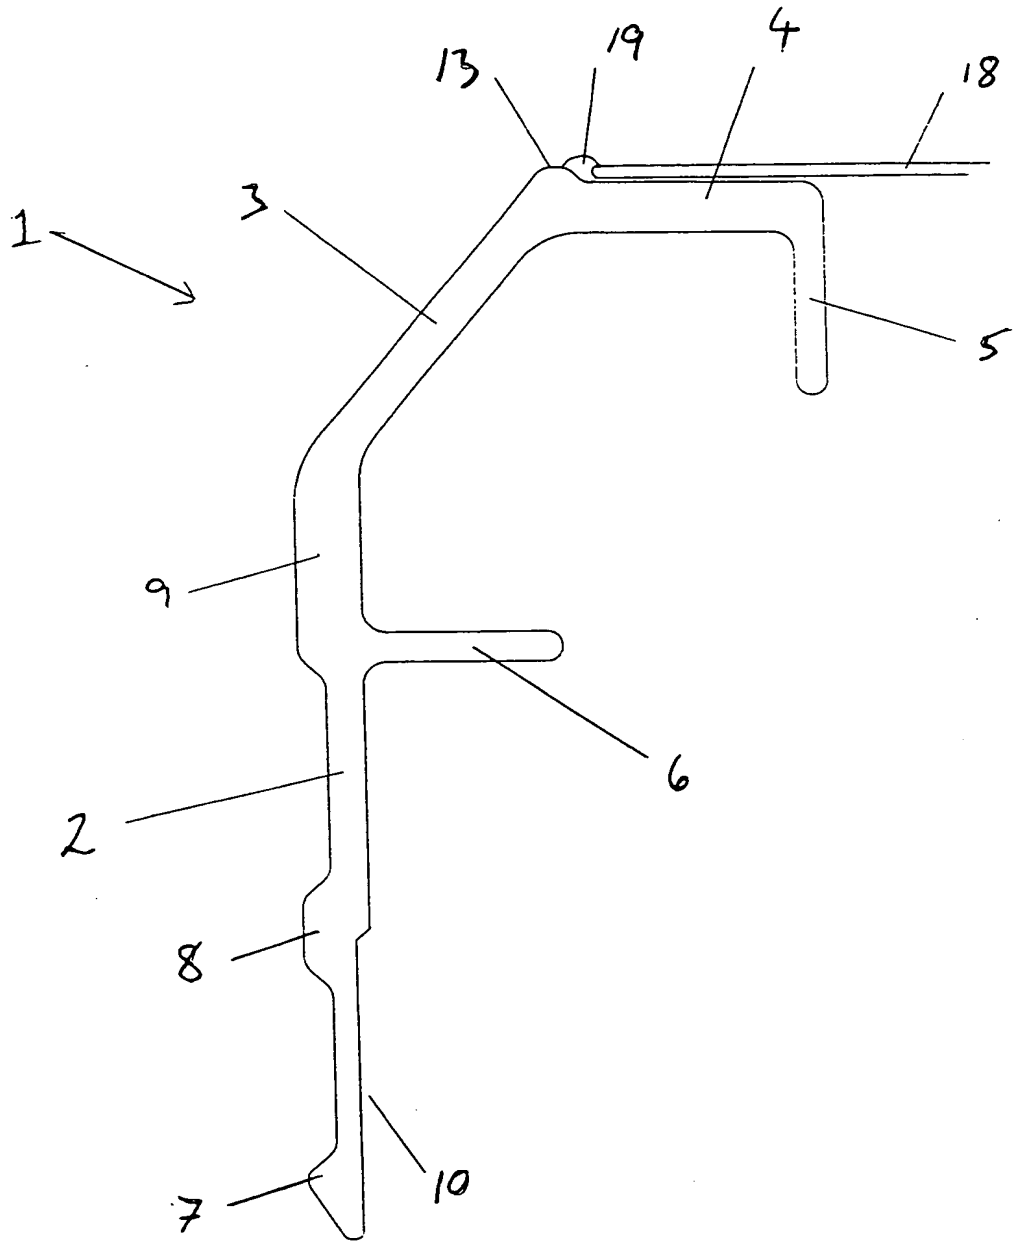**Fig. 5**

THIS PAGE BLANK (USPTO)

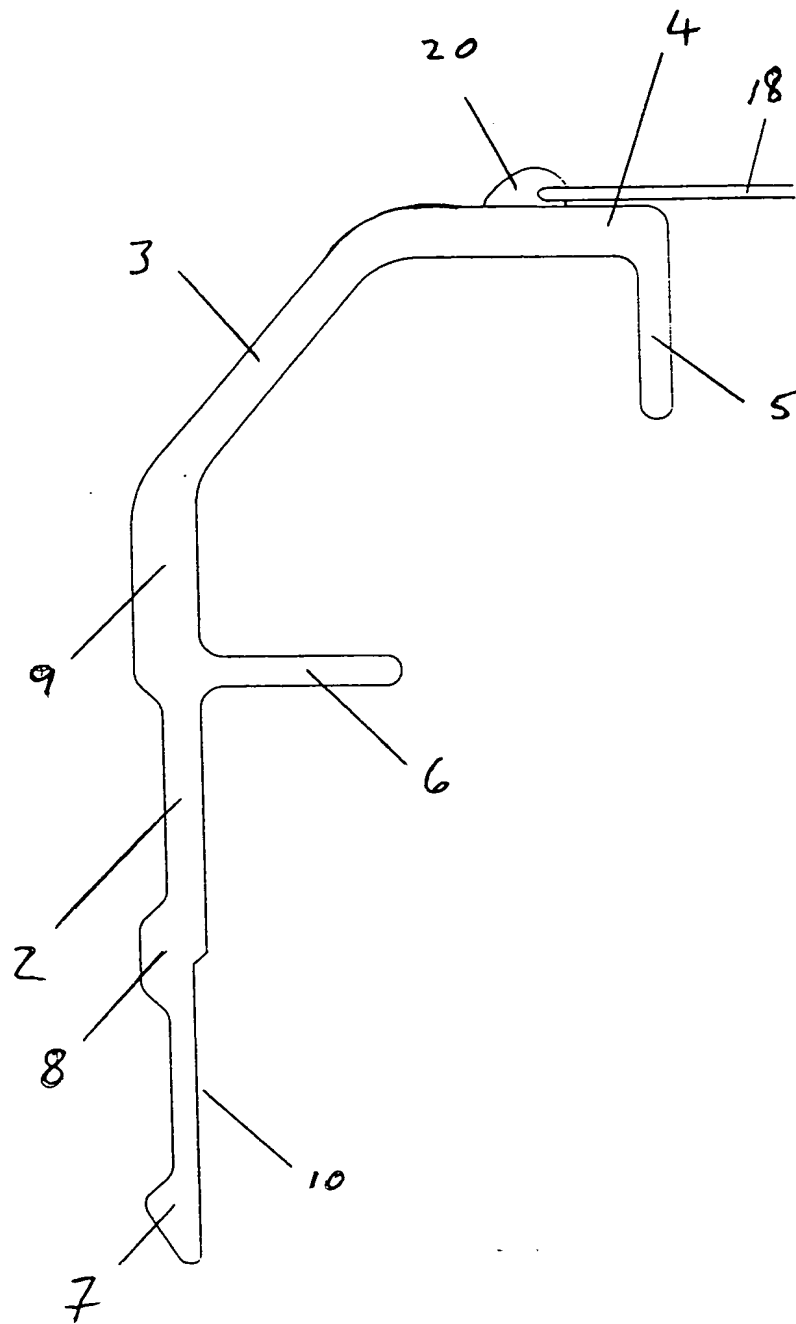**Fig. 6**

PCT/GB00/0059
12/1/0000P

Longner Parry